

Prepared by: Date 11/07/2003	 Quanta Display Inc. SPECIFICATION	Doc. No. QD23WL04-01
		Doc. Rev. : 02
		Issue Date :12/12/2003
		Page: 21 pages (Include cover page, drawing)
Preliminary		

Specification for
TFT LCD Module

Model No. QD23WL04 REV:01

☐ Customer's Approval

Date

by

Approved

By



These specification sheets are the proprietary product of Quanta Display Inc. ("QDI") and include materials protected under copyright of QDI. Do not reproduce or cause any third party to reproduce them in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of QDI.

The device listed in these technical literature sheets was designed and manufactured for use in OA equipment.

In case of using the device for applications such as control and safety equipment for transportation (aircraft, trains, automobiles, etc.), rescue and security equipment and various safety related equipment which require higher reliability and safety, take into consideration that appropriate measures such as fail-safe functions and redundant system design should be taken.

Do not use the device for equipment that requires an extreme level of reliability, such as aerospace applications, telecommunication equipment (trunk lines), nuclear power control equipment and medical or other equipment for life support.

QDI assumes no responsibility for any damage resulting from the use of the device, which does not comply with the instructions, and the precautions specified in these technical literature sheets.

Contact and consult with a QDI sales representative for any questions about this device.



Revision History			
REV.	Date	ECN NO.	Change Content
1	11/07/2003	N/A	Preliminary specification Initiate
2	12/12/2003	N/A	Page 14, timing change.

--	--	--

--	--	--

--	--	--



Content List

	Page
1. Application	5
2. Overview	5
3. General Specifications	5
4. Input Terminals	6
5. Absolute Maximum Ratings	8
6. Electrical Characteristics	9
7. Timing Characteristics	14
8. Input Signals, Basic Display Colors and Gray Scale of Each Color	15
9. Optical Characteristics	16
10. Display Quality	19
11. Handling Precautions	19
12. Reliability Test Items	20
13. Others	20
14. Drawing	21



1. Application

This specification applies to a color TFT-LCD module, QD23WL04

2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel; driver ICs, control circuit and power supply circuit and a backlight unit. Graphics and texts can be displayed on a $1280 \times 3 \times 768$ dots panel with 16.7 million colors by using the LVDS (Low Voltage Differential Signaling) interface, 8-bit driving method and supplying +12V DC supply voltage for TFT-LCD panel driving.

The TFT-LCD panel used for this module has very high aperture ratio. A low-reflection and higher-color-saturation type color filter is also used for this panel. Therefore, high-brightness and high-contrast image, which is suitable for the LCD TV, HDTV and multimedia use, can be obtained by using this module.

[Features]

- 1) High aperture panel; high-brightness
- 2) Brilliant and high contrast image.
- 3) High speed response
- 4) WXGA resolution. 15:9
- 5) LVDS interface.
- 6) ASV technology
- 7) Wide viewing angle.

3. General Specifications

Parameter	Specifications	Unit
Display size	58.44 (23") Diagonal	cm
Active area	501.12 (H) $\times$ 300.67 (V)	mm
Pixel format	1280 (H) $\times$ 768 (V)	Pixel
	(1 pixel = R+G+B dots)	
Pixel pitch	0.3915 (H) $\times$ 0.3915 (V)	mm
Pixel configuration	R,G,B vertical stripe	
Display mode	Normally Black	
Unit outline dimensions	528 x 326	mm
Thickness	Max. 38.6	mm
Weight	Max. 2700	g
Surface treatment	Anti-glare and hard-coating 3H	
Lamp Quantity	12	pcs



4. Input Terminals

4-1. TFT-LCD panel driving

CN1 (LVDS signals and +12V DC power supply)

Using connector: DF14-20P-1.25H (Hirose) or Equivalent


Pin No.	Symbol	Function	Remark
1	VDD	+12V Input	
2	VDD	+12V Input	
3	GND	Power Ground	
4	GND	Power Ground	
5	RxIN0-	Receiver signal (-)	LVDS
6	RxIN0+	Receiver signal (+)	LVDS
7	GND	Ground	
8	RxIN1-	Receiver signal (-)	LVDS
9	RxIN1+	Receiver signal (+)	LVDS
10	GND	Ground	
11	RxIN2-	Receiver signal (-)	LVDS
12	RxIN2+	Receiver signal (+)	LVDS
13	GND	Ground	
14	CLKIN-	Clock signal (-)	LVDS
15	CLKIN+	Clock signal (+)	LVDS
16	GND	Ground	
17	RxIN3-	Receiver signal (-)	LVDS
18	RxIN3+	Receiver signal (+)	LVDS
19	GND	Ground	
20	GND	Ground	

【Note 1】 All GND(ground) pins should be connected together.

【Note 2】 All V_{DD} (power supply) pins should be connected together.



4-2 Interface block diagram

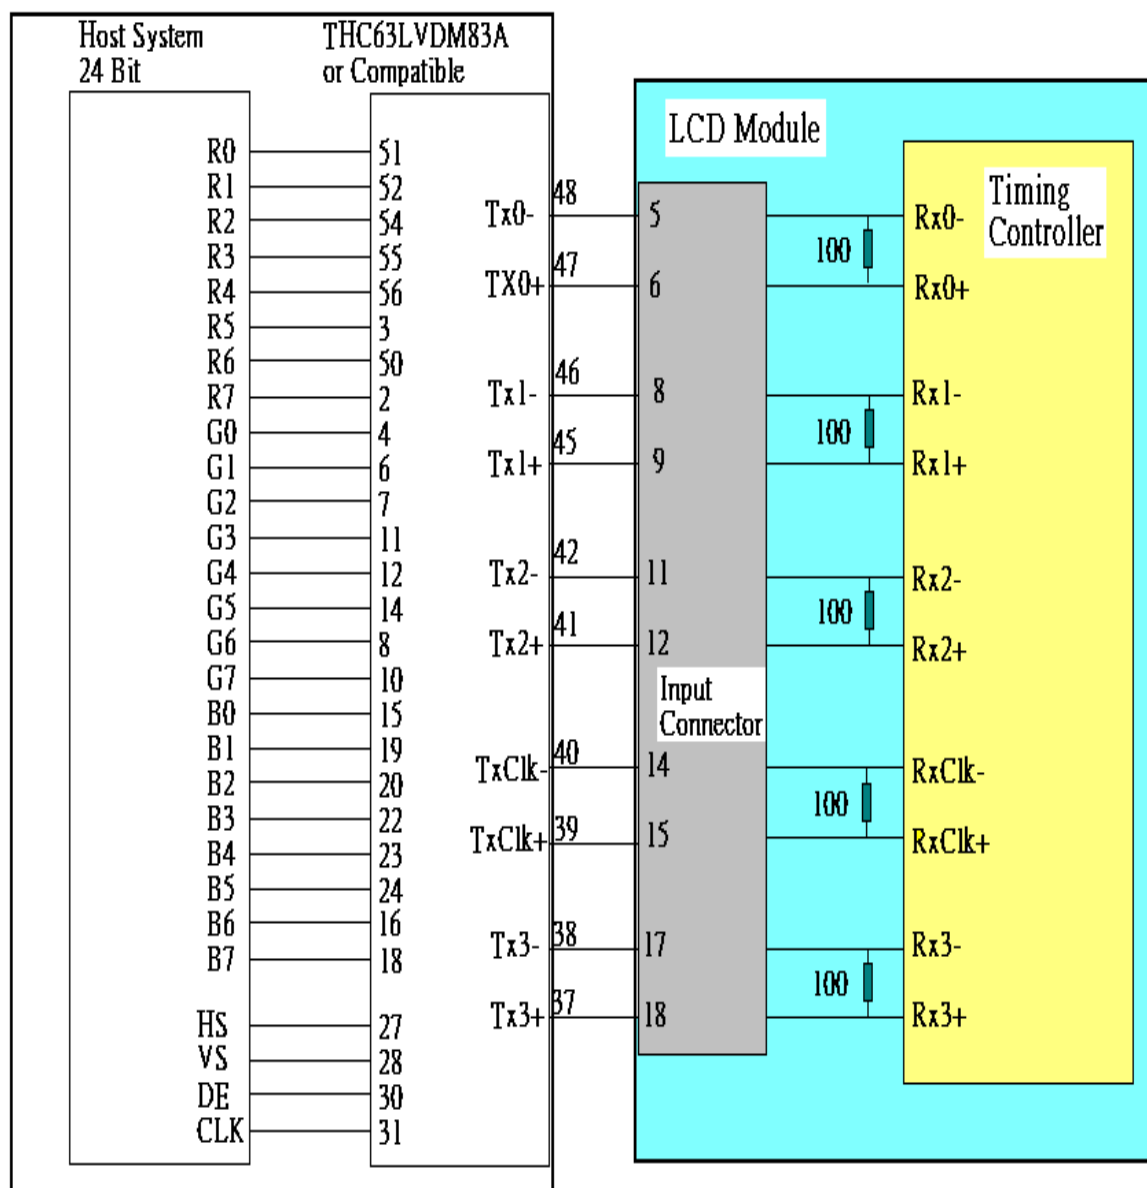

**4-3. Backlight driving**

Connector	Type	Manufactured
CN1	S12B-PH-SM3-TB	JST
CN2	SM02(12)B-BHS-1-TB	JST
CN3	DF-13-3P-1.25H	Hirose

5. Absolute Maximum Ratings**LCD module**

Parameter	Symbol	Condition	Ratings	Unit	Remark
+12V supply voltage	V_{DD}	Ta=25	-0.3 ~ +14.0	V	
Storage temperature	Tstg	-	-20 ~ +60		【Note1】
Operating temperature (Ambient)	Topa	-	0 ~ +50		

【Note1】 Humidity : 90%RH Max. at Ta 40 .

Maximum wet-bulb temperature at 39 or less at Ta>40 .

No condensation.



6. Electrical Characteristics

6-1.TFT-LCD panel driving


$T_a = 25$

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
V_{DD}	Supply voltage	V_{DD}	+11.4	+12.0	+12.6	V	【Note2】
	Current dissipation	I_{DD}	-	250	350	m A	【Note3】
Permissive input ripple voltage		V_{RP}	-	-	120	mV p-p	$V_{DD}=+12V$
Differential input threshold voltage	High	V_{TH}	-	-	+100	mV	$V_{CM}=+1.2V$ 【Note1】
	Low	V_{TL}	-100	-	-	mV	
Rush current		I_{RUSH}			2	A	Rise time 470uS

【Note1】 V_{CM} : Common mode voltage of LVDS driver.


【Note2】

Power On-off sequence

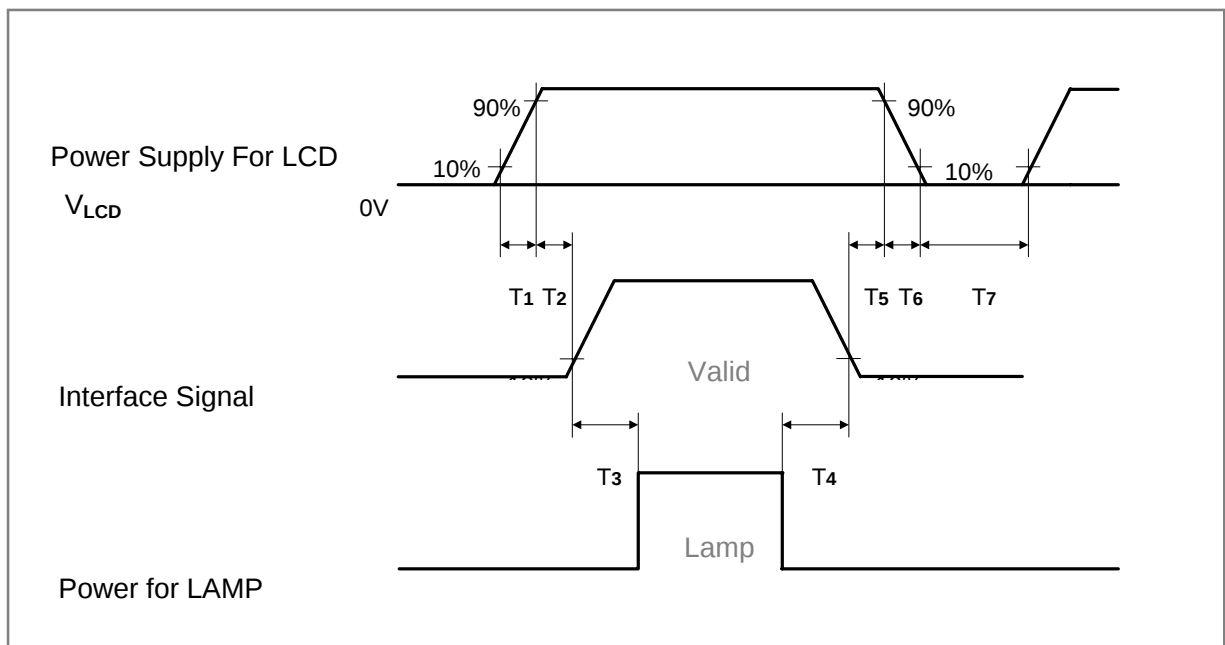

$1ms < T1, T6 \leq 10ms$ $0.5ms < T2, T5 \leq 50ms$ $200ms < T3, T4 \leq 200ms$ $T7 > 1s$

【Note3】 Maximum current condition; Change to 1x1 dot checker board pattern. $V_{DD}=+12V$



□ : 0 GS

■ : 255 GS




6-2. Backlight driving

The backlight system is a direct-lighting type with 12 CCFT (Cold Cathode Fluorescent Tube).

The characteristics of the lamp are shown in the following table.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark	
Lamp current range	I _L		4.2		mArms	【Note1】	
Lamp voltage	V _L	792	880	968	Vrms		
Lamp power consumption	P _L		3.7		W	【Note2】 IL=4.2mA	
Lamp frequency	F _L	52		55	kHz	【Note3】	
Established starting voltage	V _s			1200	Vrms	Ta=25	【Note4】
				1600	Vrms	Ta=0	
Lamp life time	L _L	50000			hour	【Note5】	

【Note1】 Lamp current is measured with current meter for high frequency as shown below.

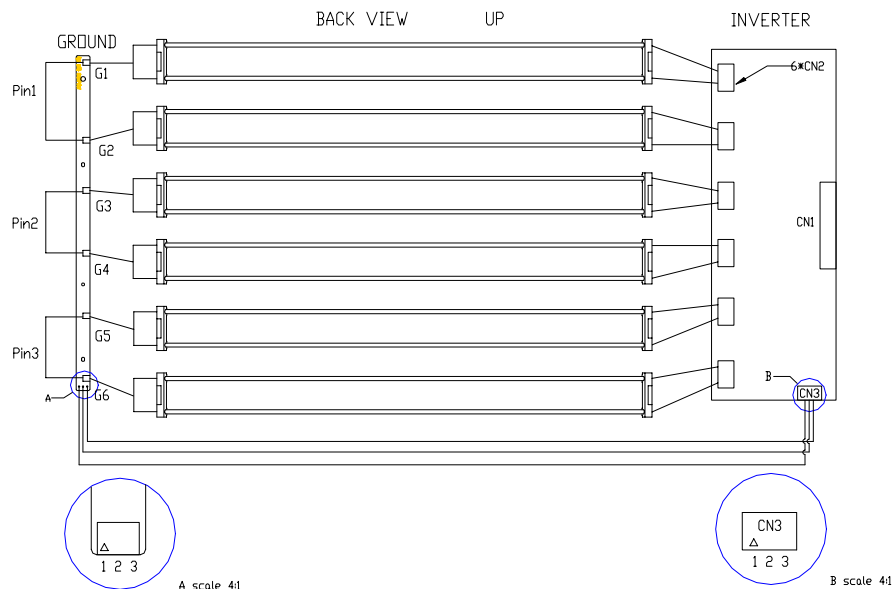

【Note2】 Calculated Value for reference ($I_L \times V_L$)

【Note3】 Lamp frequency may produce interference with horizontal synchronous frequency, and this may cause beat on the display. Therefore lamp frequency shall be detached as much as possible from the horizontal synchronous frequency and from the harmonics of horizontal synchronous to avoid interference.

【Note4】 The voltage above this value should be applied to the lamp for more than 1 second to start-up. Otherwise the lamp may not be turned on.

【Note5】 Lamp life time is defined as the time when either or occurs in the continuous operation under the condition of $T_a = 25$ and $I_L = 4.2 \text{ mArms}$.

Brightness becomes 50 % of the original value under standard condition.

Kick-off voltage at $T_a = 0$ exceeds maximum value.

【Note6】 The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. When you design or order the



inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter (miss-lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

【Note7】 The lamp wire length is 19+/-1mm(from AL back cover surface to connector, not including connector length)

6-3 Backlight inverter

6-3-1 Backlight inverter connector and pin assignments

Inverter connector CN1 : S12B-PH-SM3-TB (JST) or Equivalent

Mating connector : PHR-12(JST) or Equivalent

CN1 : Inverter connector pin assignments

Pin No.	Symbol	Description	Remark
1	VDD	Power Input +24V	
2	VDD	Power Input +24V	
3	VDD	Power Input +24V	
4	NC	Not connection	
5	PWSEL	Select of luminance control signal method	See Luminance Control
6	BRTP	PWM signal	See Luminance Control
7	BRTI	Luminance by voltage method	See Luminance Control
8	BRTC	Backlight On/OFF signal	High : On , Low: Off
9	NC	Not connection	
10	GND	Ground	Connected to metal frame
11	GND	Ground	
12	GND	Ground	

6-3-2. Inverter Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Input Voltage	VDDB		24		Vdc	
Power Supply Input Current	IDDB		2160		mA	TBD
Power Consumption	PB		51.84		W	TBD

6.4 Luminance Controls

Method	Adjustment and Luminance Ratio	PWSEL	BRTP	Remark
Voltage control	Adjustment – Continuous adjustment of Luminance by adjusting the voltage of BRTI within the rated range.	High	Open	




	BRTI voltage	Luminance ratio						
	0V	20%(minimum)						
	3.3V	100% (maximum)						
PWM control	Adjustment- The luminance is controlled by duty ratio of BRTP signal when PWSEL is low and PWM signal is inputted into BRTP termial.			Low	PWM signal	See PWM timing		
							Duty Ratio	Luminance Ratio
							0.2	20%(minimum)
							1.0	100% (maximum)


6-5. PWM timing

6-5-1. Timing diagram

- Outline chart

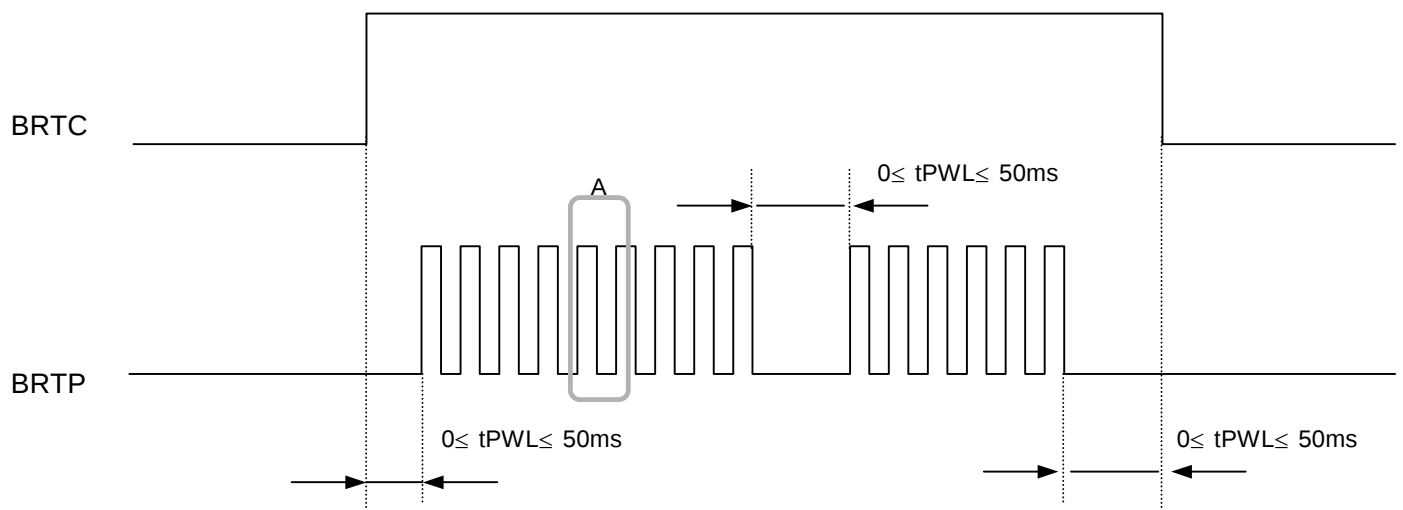

- Detail of A part

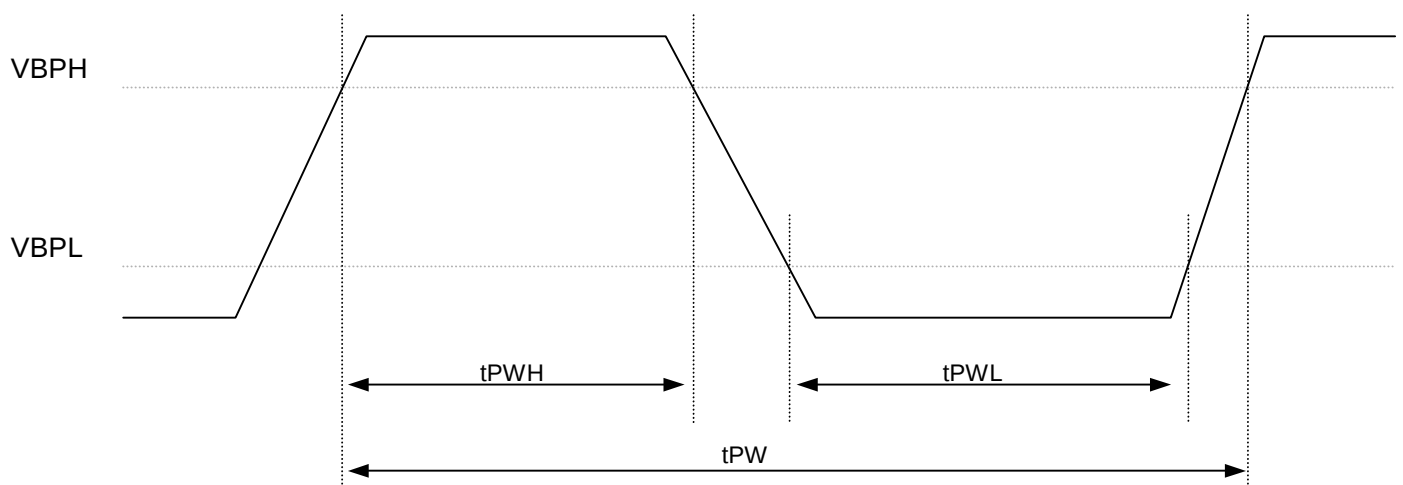

**6-5-2. Each parameter**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Luminance control frequency	FL	230	255	280	Hz	1, 2
Duty Ratio	DL	0.2	-	1.0	-	1, 3
Non signal Period	tPWL	0	-	50	Ms	4

Notes : 1. Definition of parameters is as follows

$$FL = \frac{1}{tPW}, \quad DL = \frac{tPWH}{tPW}$$

2. See the following formula for luminance control frequency.

$$\text{Luminance control frequency} = tvv \times (n+0.25) [\text{or}(n+0.72)]$$

$n=1,2,3,\dots$

tvv : See "7.1 Signal timing specification"

The interference noise of luminance control frequency and input signal frequency for LCD panel signal processing board may appear on a display. Set up luminance control frequency

so that the interference noise does not appear.

3. See "6.4 Luminance control methods"

4. If tPWL is more than 50ms, the backlight will be turned off by a protection circuit for inverter.



7. Timing characteristics of LCD module input signals

7-1. Timing characteristics


(This is specified at digital outputs of LVDS driver.)

Item	Symbol		Min	Typ	Max	Unit	Remark
Data Clock	Period	tCLK	12.2	12.5	-	ns	
	Frequency	FCLK	-	80	82	MHZ	
Hsync	Period	tHA	1337	1648	1780	tCLK	
	Frequency	fH	44.0	48.54	52	KHZ	
	Width	tHC	8	16	-	tCLK	
Vsync	Period	tVA	774	810	-	tHA	NTSC: 57~63HZ
	Frequency	fV	47	60	63	HZ	PAL: 47~53HZ
	Width	tVC	2	6	-	tHA	
DE (Data Enable)	Horizontal Valid	tHE	1280	1280	1280	tCLK	
	Horizontal Back Porch	tHD	8	80	-		
	Horizontal Front Porch	tHF	16	272	-		
	Horizontal Blank	tHB	57	368	-		
	Vertical valid	tVE	768	768	768	tHA	
	Vertical Back Porch	tVD	2	20	-		
	Vertical Front Porch	tVF	2	16	-		
	Vertical Blank	tVB	6	42	-		

Notes : 1.The performance of electro-optical characteristics may be influenced by variance of the vertical refresh rate.

2. Hsync period will be a double number of character (8).

7-2 Signal Timing Waveform(The time “B” is tHB on horizontal timing and tVB on vertical timing)

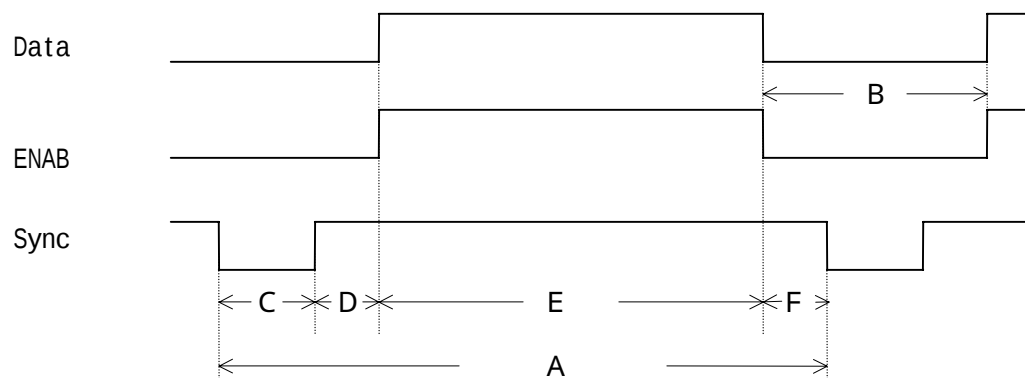



8. Input Signals, Basic Display Colors and Gray Scale of Each Color

	Colors & Gray scale	Data Signal																											
		R0 R1 R2 R3 R4 R5 R6 R7	G0 G1 G2 G3 G4 G5 G6 G7	B0 B1 B2 B3 B4 B5 B6 B7																									
Basic Color	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1																									
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																									
	Cyan	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1																									
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	Magenta	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1																									
	Yellow	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																									
	White	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1																									
Gray Scale of Red	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	⤴	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	Darker	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	⤴	⬆							⬆							⬆													
	⤵	⬇							⬇							⬇													
	Bright	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	⤵	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
Gray Scale of Green	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	⤴	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	Darker	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	⤴	⬆							⬆							⬆													
	⤵	⬇							⬇							⬇													
	Bright	0 0 0 0 0 0 0 0	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0																									
	⤵	0 0 0 0 0 0 0 0	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																									
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																									
Gray Scale of Blue	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																									
	⤴	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0																									
	Darker	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0																									
	⤴	⬆							⬆							⬆													
	⤵	⬇							⬇							⬇													
	Bright	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 0 1 1 1 1 1 1																									
	⤵	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 1 1 1 1 1 1 1																									
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1																									

0 : Low level voltage, 1 : High level voltage

9. Optical Characteristics

$T_a=25$, $V_{DD}=+5V$

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range	L/R	θ_{21}, θ_{22}	CR>10	85	88		Deg.	【Note1,4】
	U	θ_{11}		85	88		Deg.	
	D	θ_{12}		85	88		Deg.	
Contrast ratio		C R n	$\theta=0^\circ$	500	600	-		【Note2,4】
Response time		τ		-	21		ms	【Note3,4】
Rise time	τ_r				15		ms	
Fall time	τ_d				6		ms	
Chromaticity of White (CIE 1931)		W_x		0.247	0.277	0.307		【Note4】
		W_y		0.264	0.294	0.324		
Chromaticity of Red (CIE 1931)		R_x		0.611	0.641	0.671		
		R_y		0.312	0.342	0.372		
Chromaticity of Green (CIE 1931)		G_x		0.245	0.275	0.305		
		G_y		0.583	0.613	0.643		
Chromaticity of Blue (CIE 1931)		B_x		0.117	0.147	0.177		
		B_y		0.040	0.070	0.100		
Luminance of white 【Note4】		Y_L		350	450		Cd/m ²	
White Uniformity		δ_w		-	-	1.25		【Note5】

The measurement shall be executed 30 minutes after lighting at rating. (typical condition : $I_L = 4.2$ mArms)

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.1 below.


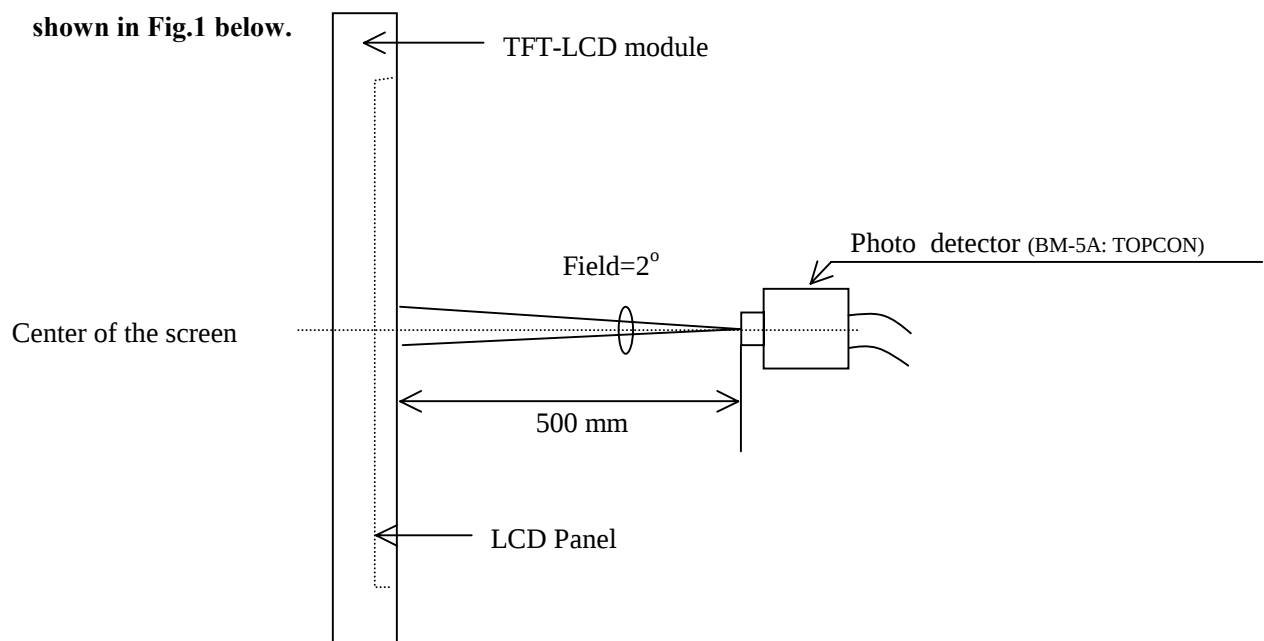


Fig 1. Optical characteristics measurement method

【Note1】 Definitions of viewing angle range:

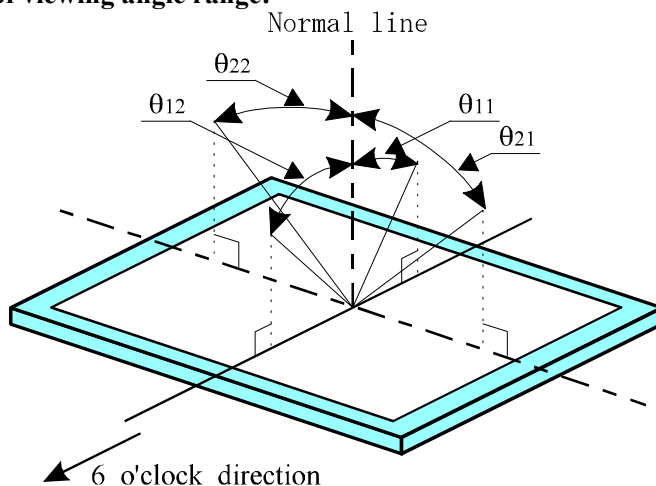


【Note2】 Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

【Note3】 Definition of response time:

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white" .

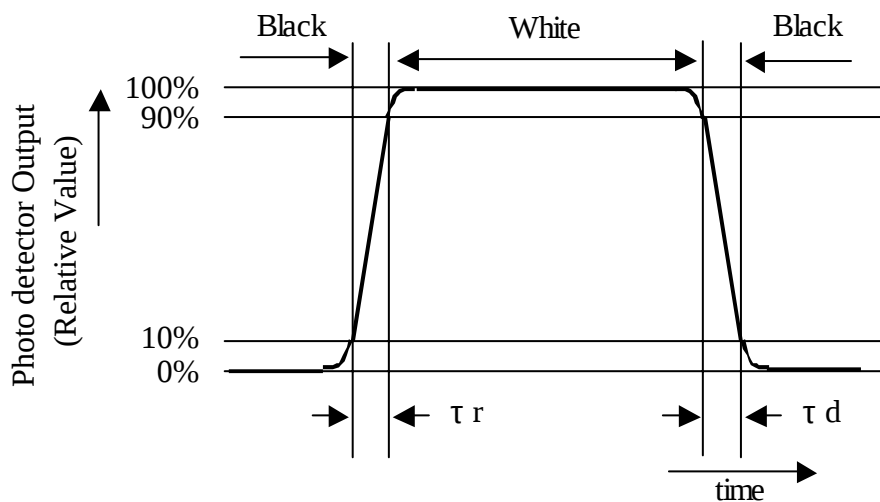


【Note4】 This shall be measured at center of the screen.



【Note5】 Definition of white uniformity:

White uniformity is defined as the
following with five measurements
(A ~ E). HxV : active area

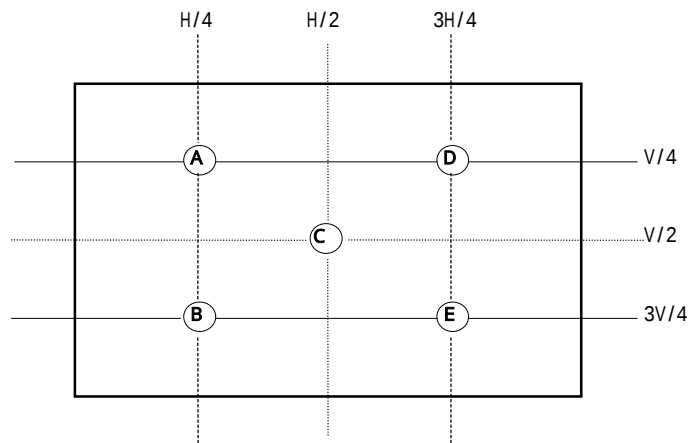

$$\delta_w = \frac{\text{Maximum Luminance (of 5 points measurement)}}{\text{Minnum Luminance (of 5 points measurement)}}$$



10. Display Quality

The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standard.

11 . Handling Precautions

- a) Be sure to turn off the power supply when inserting or disconnecting the cable.**
- b) Be sure to design the cabinet so that the module can be installed without any extra stress such as warp or twist.**
- c) Since the front polarizer is easily damaged, pay attention not to scratch it.**
- d) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.**
- e) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.**
- f) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface. Handle with care.**
- g) Since CMOS LSI is used in this module, take care of static electricity and injure the human earth when handling.**
- h) Observe all other precautionary requirements in handling components.**
- i) This module has its circuitry PCBs on the rear side and should be handled carefully in order not to be stressed.**
- j) Laminated film is attached to the module surface to prevent it from being scratched . Peel the film off slowly just before the use with strict attention to electrostatic charges. Ionized air shall be blown over during the action. Blow off the 'dust' on the polarizer by using an ionized nitrogen gun, etc..**




12. Reliability test items

No.	Test item	Conditions
1	High temperature storage test	Ta = 70 240h
2	Low temperature storage test	Ta = -30 240h
3	High temperature & high humidity operation test	Ta = 50 ; 95 %RH 240h
4	High temperature operation test	Ta = 60 240h
5	Low temperature operation test	Ta = 0 240h
6	Vibration test (non- operating)	Frequency: 10 ~ 500Hz, 1.2G , 1 Hr/each axis
7	Shock test (non- operating)	Gravity : 100G Pulse width : 2ms, half sine wave Direction : ± X, ± Y, ± Z Once for each direction.
8	ESD	Contact-op: +8kv, Contact-nop: +10kv, Air-op: +15kv, Air-nop: +20kv, (contact area is limited on metal bezel)

13 . Others

1) Lot No. Label:

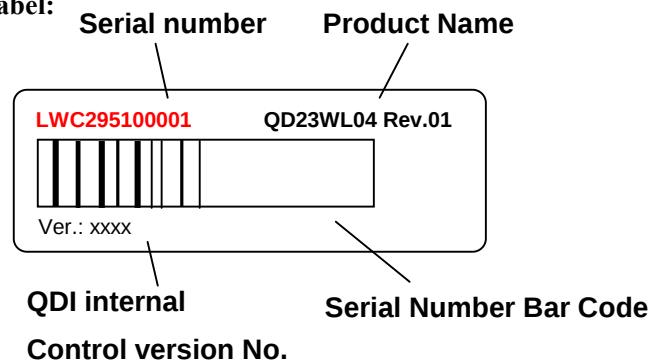

LWC295100001 Digital code 4, 5 is Date code.

Digital 4 (Year) 1: 2001, 2: 2002, 3: 2003,

Digital 5 (Month) 1: Jan, 2: Feb, ... , A: Oct, B: Nov., C: Dec.

2) Adjusting volume has been set optimally before shipment, so do not change any adjusted value.

If adjusted value is changed, the specification may not be satisfied.

3) Disassembling the module can cause permanent damage and should be strictly avoided.

4) Please be careful since image retention may occur when a fixed pattern is displayed for a long time.

5) If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.



14. Drawing

